

Superior Filtration for Motorcycles and Powersports Equipment

Motorcycle and powersports enthusiasts want their equipment to run at peak performance and deliver years of satisfaction. Many have invested thousands of dollars and untold hours into acquiring and taking care of their machines. Dirt and other particles, however, can infiltrate the engine and cause wear. Over time, the engine can become less efficient, lose power and fail to deliver the “like-new” feeling enthusiasts desire when riding. AMSOIL Motorcycle Oil Filters (EaOM) incorporate the same synthetic media found in AMSOIL Oil Filters (EaO/Ea15K) for auto/light-truck applications. Their excellent filtering efficiency maximizes wear protection, helping equipment run at peak efficiency and last longer.



Maximum Protection Against Wear

The unique construction and full-synthetic media of AMSOIL Motorcycle Oil Filters allow them to provide excellent performance in motorcycles and other powersports equipment. They are designed to last longer, remove smaller particles and offer less restriction than other filters. AMSOIL Motorcycle Oil Filters provide filtering efficiency of 99 percent at 20 microns, delivering outstanding protection for motorcycles and other equipment.

Durable Construction

AMSOIL Motorcycle Oil Filters feature a specially constructed silicone anti-drainback valve (where applicable) and a nitrile sealing gasket to go along with full-synthetic media. The anti-drainback valve provides excellent protection during startup and remains flexible in all temperatures. The nitrile sealing gasket resists chemical breakdown, providing excellent durability and ensuring long filter life. Motorcycle Oil Filters are fluted for easy removal and are available in chrome.


Multiple Applications

AMSOIL Motorcycle Oil Filters provide outstanding protection for motorcycles, ATVs, UTVs, four-stroke personal watercraft, four-stroke snowmobiles and four-stroke outboards. AMSOIL provides Motorcycle Oil Filters for the most popular powersports applications.

- **Guard** against engine wear
- **Help** extend engine life
- **Help** improve performance
- **Fluted** for easy removal

99% Efficiency at 20 Microns

Filtering particles >20 microns fights engine wear.^{AA}

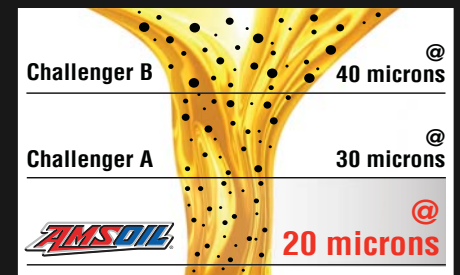

^{AA}In accordance with industry-standard ISO SO 4548-12.

RECOMMENDED ACCESSORIES

Filter wrenches with a 3/8" square drive offered by AMSOIL are designed to install and remove AMSOIL Oil Filters and Motorcycle Oil Filters in hard-to-reach locations.

Filter Wrench (64 mm) (GA265) Recommended for AMSOIL Oil Filters and Motorcycle Oil Filters EA15K09, EA15K10, EA15K12, EA15K13, EAO14, EAOM103, EAOM103C, EAOM109.

Filter Wrench (74 mm) (GA258) Recommended for AMSOIL Motorcycle Oil Filters EAOM132, EAOM132C, EAOM133, EAOM133C, EAOM137C.

Filter Wrench (76 mm) (GA251) Recommended for AMSOIL Oil Filters and Motorcycle Oil Filters EAO17, EAO18, EAO23, EA15K29, EA15K32, EAO34, EAO37, EAO38, EA15K50, EA15K51, EA15K53, EAO55, EAO64, EAOM122, EAOM134, EAOM134C, EAOM135, EAOM135C, EAOM136C, EAOM138.

SERVICE LIFE

For maximum engine protection, change AMSOIL Motorcycle Oil Filters at every oil change. When AMSOIL Motorcycle Oil Filters are used with a motor oil other than AMSOIL synthetic motor oil, change the filter according to the vehicle manufacturer's recommendation.

Consult the AMSOIL Product Guide, AMSOIL Online Filter Cross-Reference or MyAMSOILGarage™ at www.amsoil.com to determine the appropriate filter for each application.

TECHNICAL SERVICES

For immediate answers to your technical questions call (715) 399-TECH (8324) between 8 a.m. and 5 p.m. Central time or email tech@amsoil.com.

AMSOIL PRODUCT WARRANTY

AMSOIL products are backed by a Limited Liability Warranty. For complete information visit www.amsoil.com/warranty.aspx.



AMSOIL products and Dealership information are available from your local full-service AMSOIL Dealer.